
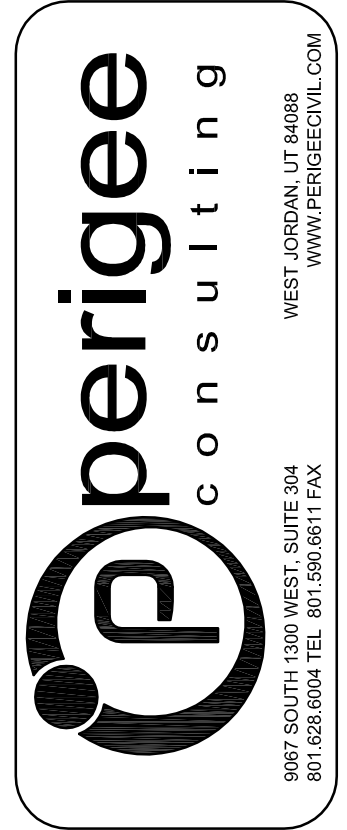


Stock Pile Volumes (CY)			
Item	Description	Clarifications	
1	Top Soil Cut	Stock Pile Top Soil Cut (2' fills onsite)	35,000
2	Top Soil Cut	Stock Pile Top Soil Cut (Fills offsite - 1 mile round trip)	40,000
3	Granular Soil Cut	Stock Pile Granular Soil Cut (Greater than 2' fills onsite)	40,000
4	Granular Soil Cut	Stock Pile Granular Soil Cut (Fills offsite - 1 mile round trip)	25,000
Total Cut			140,000

Village 5 Mass Grading Volumes (CY) - 12" lot depth from TBC			
Item	Description	Clarifications	
5	Granular Soil Cut	Village 5 Mass Grading Granular Soil Cut (stock pile offsite - 1 mile round trip)	35,000
6	Remaining Cut	Village 5 Mass Remaining Cut (Fills onsite)	45,000
7	Total Cut		80,000
8	Total Fill	Total V5 Fills (fill with onsite materials)	120,000
Net Fill			(75,000)

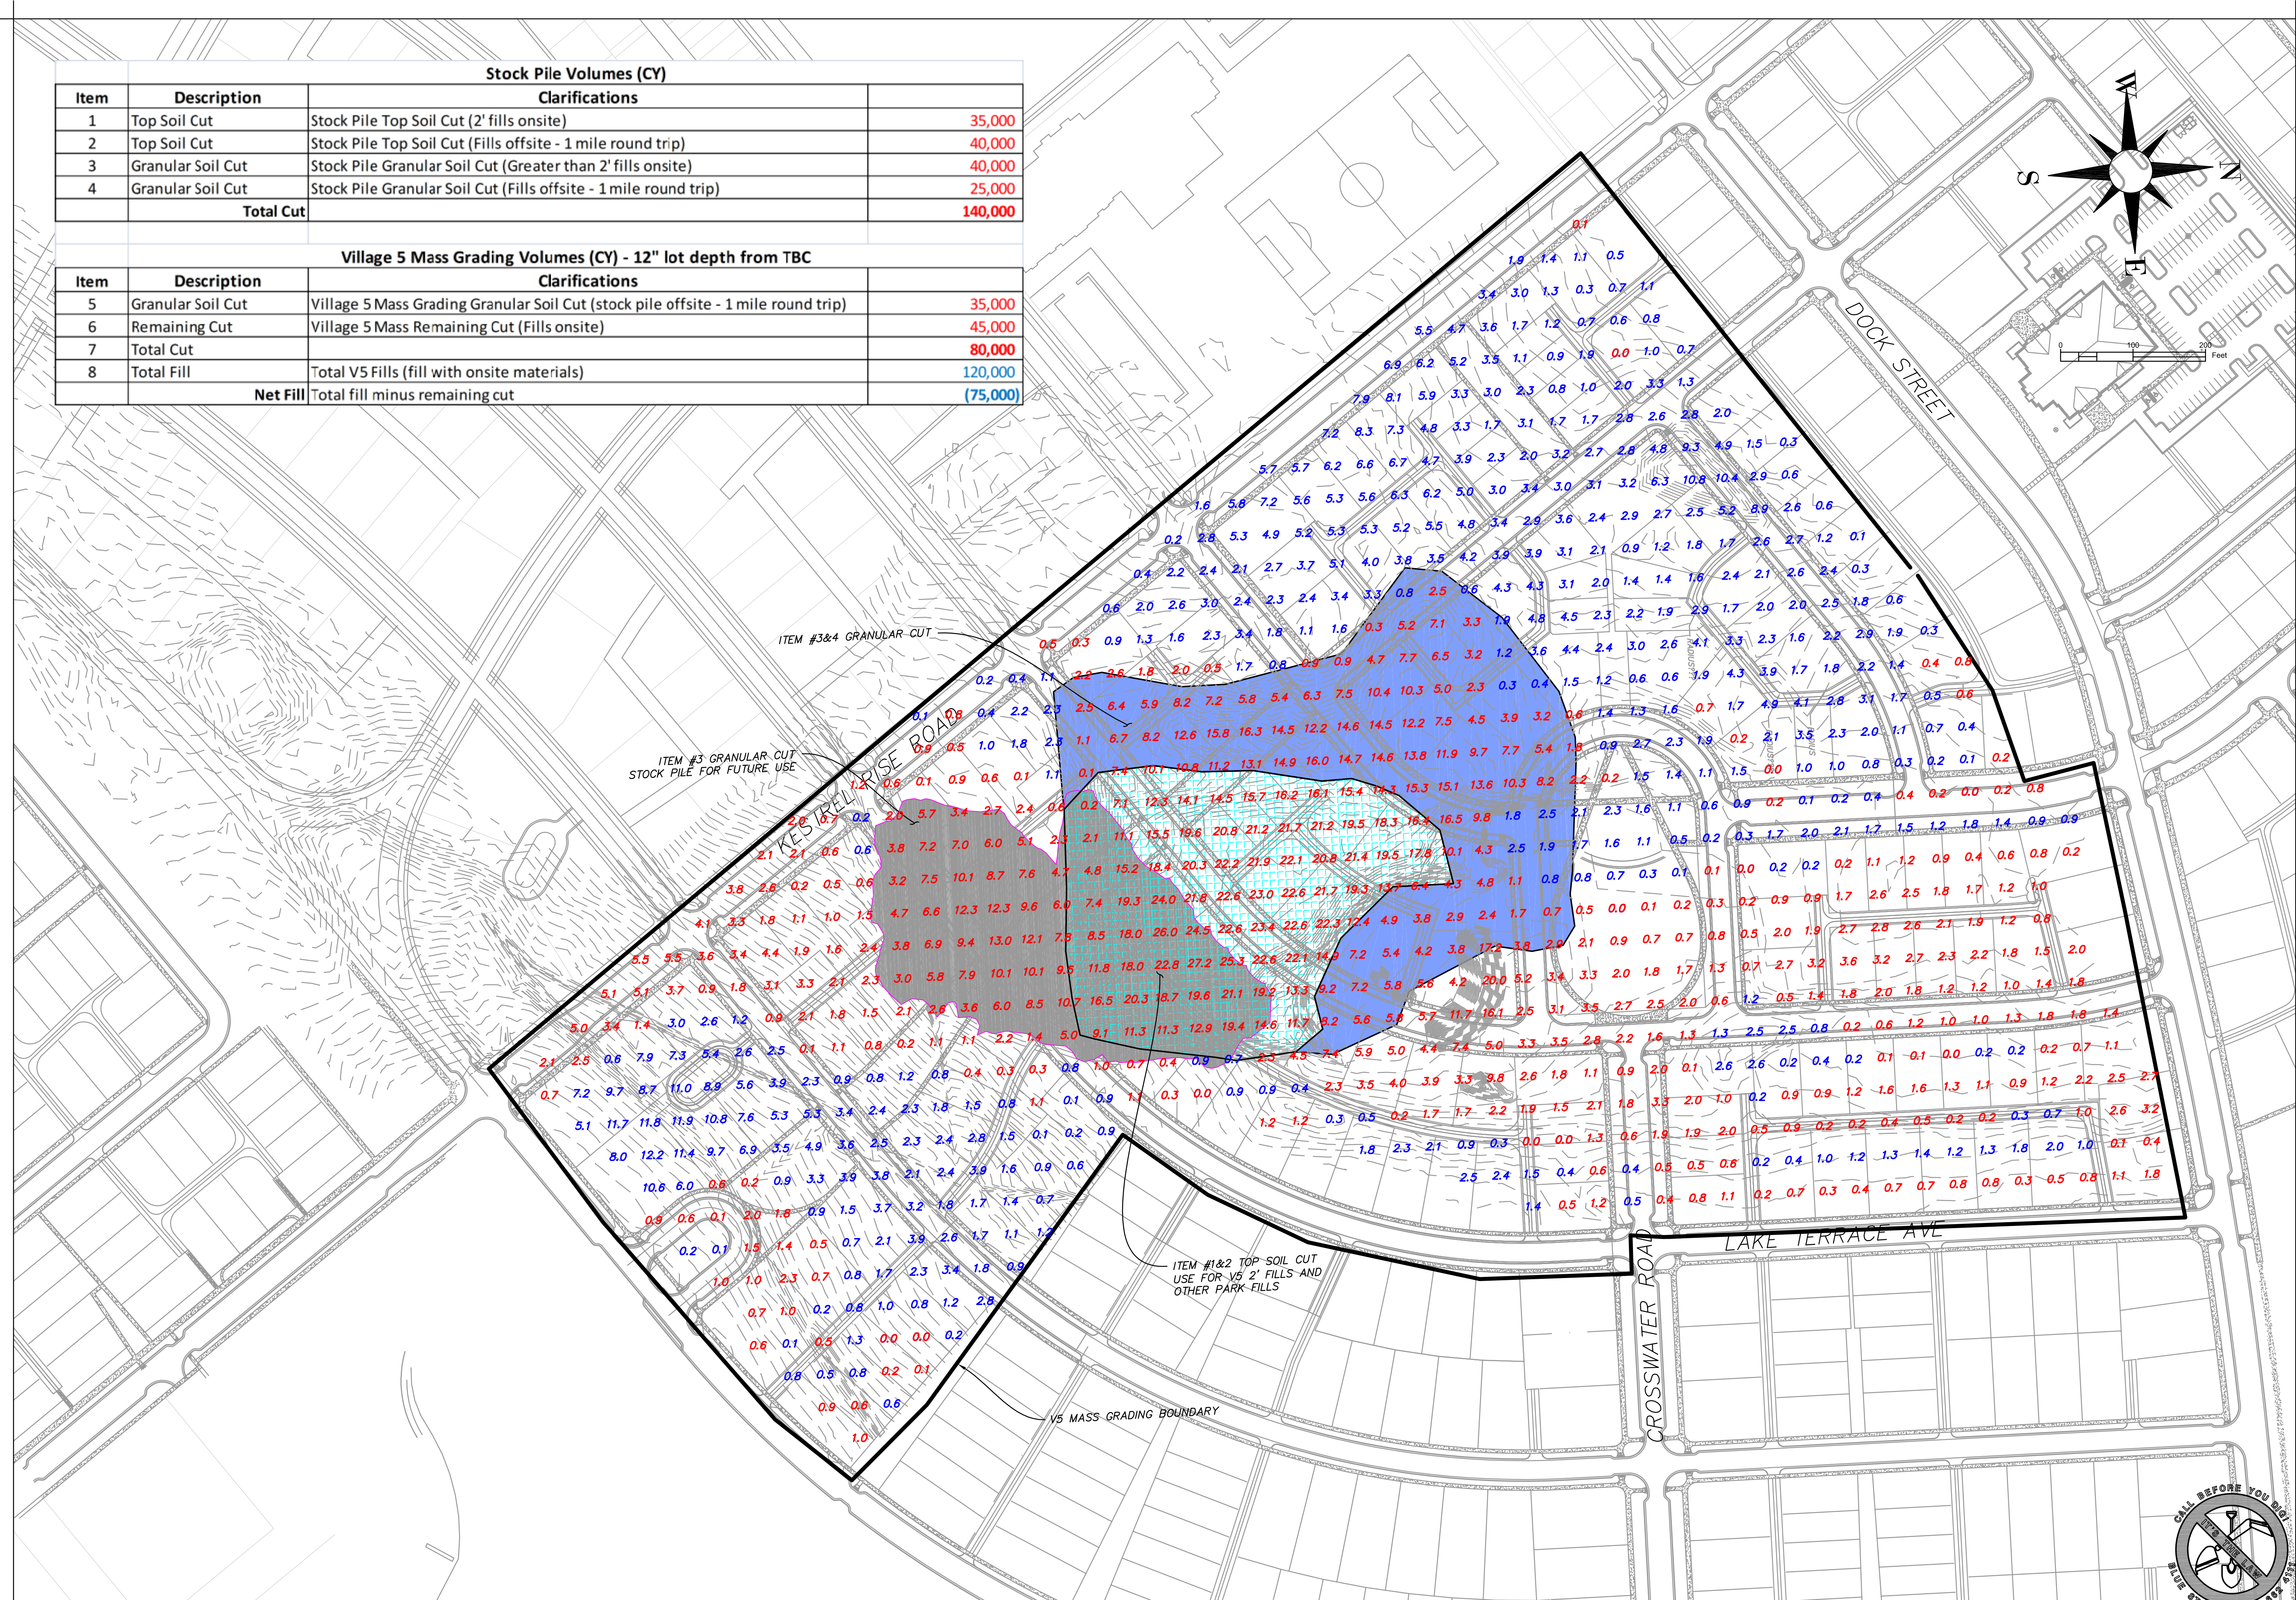

SOUTH JORDAN CITY

CITY ENGINEER DATE

DATE	DESCRIPTION	MARK	DATE	APPR.

DATE	DATE	REV.
JAN 2015	JAN 2015	

DAYBREAK  
VILLAGE 5 & VILLAGE 4  
GRADING STUDY

SHEET NUMBER  
01  
OF 01 SHEETS  
DRAWING NAME  
ET01

